

10-02-00

A

JC921 U.S. PTO
09/29/00

IBM Docket No. [BOC9-2000-0005US1]

**In the United States Patent and Trademark Office
Patent Application Transmittal***Transmitted herewith for filing is the Patent Application of:*

Inventor(s): Howard L. Operowsky, Edith H. Stern and Barry E. Willner

For: Method and System for Providing Directions for Driving

JC926 U.S. PTO
09/29/00

09/29/00

Enclosed are24 pages of specification, including 25 claims, plus 5 sheets of *formal* drawings.

X An assignment of the invention to International Business Machines Corporation, Armonk, New York 10504.

A certified copy of a/an application.

X Declaration and Power of Attorney.

X One return post card

Other

:

Filing Fee Calculation (For Other Than Small Entity)

Basic Fee:						\$690.00
Claims Fees:	Filed	Limit	Extra		Rate per Extra	
Total claims:	25	20	5		18	\$90.00
Independent claims:	4	3	1		78	\$78.00
Multiple Dependent Claim Presented					260	\$0.00
					Total	\$858.00

Please charge Deposit Account **09-0452** for the **Total \$1,056.00** set forth above. The Commissioner is authorized to charge payment of any additional filing fees required under 37 CFR §1.116 and any patent application processing fees under 37 CFR §1.117 or to credit any overpayment to the identified account. A duplicate copy of this sheet is enclosed.

09/29/00

IBM Docket No. [BOC9-2000-0005US1]



Express Mail Certificate

Express Mail Label: EJ533946121US

No:

Date: September 29, 2000

I hereby certify that I am depositing the papers identified above with the U.S. Postal Service "Express Mail Post Office to Address" service on the above date, addressed to the Commissioner of Patents and Trademarks, Washington, DC 20231 on September 29, 2000.

Kenneth A. Seaman

BY: *Kenneth A. Seaman*

Kenneth A. Seaman

Attorney of Record
Reg. No. 28,113

Date: September 29, 2000

219 Glen Oaks Road
Charlotte NC 28270

Telephone:
705-365-6363

FAX call first

006260-3656363

CERTIFICATE OF MAILING

I hereby certify that this correspondence is being deposited with the United States Postal Service as Express Mail in an envelope addressed to:

ASSISTANT COMMISSIONER OF PATENTS
WASHINGTON D.C. 20231

bearing Label Number EJ533946121US and mailed September 29, 2000

signed Kenneth A. Seaman

name Kenneth A. Seaman

Docket No.: BOC9-2000-0005US1

APPLICATION FOR UNITED STATES PATENT

To all whom it may concern:

Be it known that we, Edith H. Stern, Howard L. Operowsky and Barry E. Willner, all citizens of United States residing in the state New York, United States, have invented new and useful improvements in a

METHOD AND SYSTEM FOR PROVIDING DIRECTIONS FOR DRIVING

of which the following is a SPECIFICATION:

METHOD AND SYSTEM FOR PROVIDING DIRECTIONS FOR DRIVING

Background of the Invention

Field of the Invention

The present invention relates to a system and method for providing information to a driver without requiring that the driver remove his eyes from the road. More particularly, the present invention relates to a system and method for providing information such as navigational information such as directional instructions to a driver based on his position and stored information that will allow the driver to travel in the desired direction without requiring that the driver look away from the windshield.

Background Art

Driving to an unknown destination or in an unfamiliar location presents the opportunity for a driver to get lost or to miss his turn. Perhaps the driver was looking for a road by a particular name (e.g., "Main Street" or "Harbor Freeway") and he encounters an intersection without a street sign or with a sign which has another designation (e.g., "Route 1" or "Interstate 5"). The driver does not know whether to turn or drive forward through the intersection, continuing to look for "Main Street" or "Harbor Freeway" because he does not know where Main Street is supposed to be or what the desired intersection is supposed to look like.

Often directions are provided from maps or from verbal instructions without clear and accurate indications as to how far the desired intersection (e.g., "Main Street" or "Harbor Freeway") is from the present location of his vehicle. Even when an accurate and precise

indication of distance is given (e.g., “go 2.7 miles from the origin down Center Street until you intersect Main Street and turn right”), the direction would require that the driver note the initial mileage, calculate the destination mileage of 2.7 miles farther and then observe when the 2.7 miles have passed to find Main Street, an activity which might require frequent calculations and attention to the odometer. Obviously, the driver’s looking at the odometer requires the driver to remove his eyes from the road to look at the odometer (instead of the traffic on the road). While a good driver will keep the glances at the odometer to a minimum to allow the greatest attention to be focused on the roadway and its every-changing perils, this presents a distraction.

It would be desirable to have a system of providing directions which allows a driver to enter a destination, then get detailed instructions on how to get there, complete with an appropriate notification of when to turn and which way. Advantageously, these detailed instructions would indicate a necessary turn with an indication provided shortly before the desired turn to allow the driver to concentrate on the driving and the view out the windshield and not on maps or even on a video screen within the car (for example, mounted on the console of the vehicle in the case of a system provided by Hertz and called the "NeverLost" system or in similar navigational aids provided by auto companies such as General Motors). The Hertz NeverLost system includes a route set on a console unit which is used to show messages about turns on the console unit, with a tone indicating that a message has been displayed on the console. However, the console is located away from the windshield and looking at the console requires the driver to remove his eyes from the road.

Anything which distracts the driver's eyes from the road presents a risk of collision or leaving the road. So, if the driver must watch the odometer to know when his turn is expected,

he can not be watching the road at the same time. Similarly, if the driver is looking at a map or a display on the console, the driver can't be simultaneously looking at the road.

If, for any reason, the driver should miss a turn, the sooner the driver is alerted to the fact that the turn was missed, the easier and quicker the driver may be able to recover from the mistake.

It would also be desirable to have a system where the driver receives multiple advisory alerts or warnings of an upcoming turn at different distances from the turn and it would be desirable if the advance notice was related to the speed at which the vehicle is approaching the turn. That is, an indication of a turn 100 feet in advance may be adequate where the vehicle is traveling 5 miles per hour (or about 7 feet per second), but an indication of the turn 100 feet in advance of the turn while the vehicle is traveling 70 miles per hour allows only a one second advance notice before the turn, while turning may require more than the second just to decelerate. Accordingly, it would be desirable to provide a notice of a turn at one or more relatively fixed time intervals before the turn (perhaps 15 seconds and 5 seconds before) rather than a predetermined distance before the turn, rather than a fixed distance before a turn. Since the use of location alone provides only the distance, it is necessary to combine the location information with speed information to provide an alert which is based on calculated time to the turn, but this is accomplished using speed information. Speed information can be calculated from past geographic positions or can be obtained from a connection to the vehicle (the speedometer or changes in the odometer).

The description of the present invention which follows is based on a presupposition that the reader has a basic knowledge of global positioning systems and of stored maps which are available over the Internet. Such global positioning systems can provide the present position of a

Summary of the Invention

The present invention overcomes the disadvantages and limitations of the prior art systems by providing a simple, yet effective, way of providing information (including, but not limited to, directional information) to a driver while the driver is operating his vehicle.

The present invention allows the driver to obtain the information on the desired route and necessary turns without removing his eyes from the road.

The present invention also has the advantage of providing the driver with the necessary information on turns at the appropriate time for taking action -- neither too early (so the instruction might cause an early turn into the wrong street or be forgotten) or too late (for example, after the opportunity for the turn has passed or when it is too late to get into the correct turning lane).

One additional benefit of the present invention is that the driver may be provided with one or more warnings or alerts on upcoming turns at preset time periods in advance of a calculated turn rather than at preset distances which may require vastly different elapsed times depending on the speed of the vehicle.

The present invention includes a system for displaying driving instructions such as a turn on the windshield in front of the driver so that the driver may view the instruction without removing his eyes from the road. This instruction is preferably in the form of an illustration of the intersection with appropriate landmarks in the form of a picture taken by a camera, although other indicators (such as a word instruction) could be used to advantage if no pictorial

illustrations are available. The illustrations could be from a camera in the form of a real time image or from a stored illustration of the intersection, with appropriate landmark information such as street layout and name being preferable but not mandatory.

In one embodiment of the present invention, a supplemental audible indication is provided to the driver. This supplemental audible indication may be a signal (a bell or a stored voice message to the effect of "see message displayed on windshield") or, in the alternative, it could be an audible version of the message displayed on the windshield, created using speech synthesis.

Other objects and advantages of the present invention will be apparent to those skilled in the appropriate art, considering the following description of the present invention taken together with the appended claims and the accompanying drawings.

Brief Description of the Drawings

Having thus set forth some of the limitations and disadvantages of the prior art and some objects and advantages of the present invention, other objects and advantages will be apparent to those skilled in the relevant art in view of the following description of the drawings illustrating the present invention of an improved routing system and method in which:

Fig. 1 is a perspective illustration of the front of a vehicle, useful in describing the present invention;

Fig. 2 is a modified view of the front of a vehicle as shown in Fig. 1 with a message regarding driving directions provided to the driver on the windshield;

Fig. 3 is a block diagram of a processing system useful in practicing the invention of type described in connection with the providing the message to the driver as illustrated in connection with Fig. 2;

Fig. 4 is a flow chart for the system and method of the present invention; and

Fig. 5 is a view of the front of the vehicle similar to Fig. 2 but with an alternate message.

Detailed Description of the Preferred Embodiment

In the following description of the preferred embodiment, the best implementations of practicing the invention presently known to the inventors will be described with some particularity. However, this description is intended as a broad, general teaching of the concepts of the present invention in a specific embodiment but is not intended to be limiting the present invention to that as shown in this embodiment, especially since those skilled in the relevant art will recognize many variations and changes to the specific structure and operation shown and described with respect to these figures.

Fig. 1 shows the front interior portion of a vehicle, looking forward (or outward) in the direction of travel from the driver's position. As shown in this vehicle, the driver looks over the steering wheel 2 through a windshield 3 out at the roadway (not shown) in front of the vehicle. An instrument panel 4 is positioned below the windshield and mounted to the dash panel, with the instrument panel including appropriate indicators, gauges, dials and controls for the vehicle, including the odometer which is frequently used by drivers in locating the desired turns. A touch

screen 5 is located on the dash panel adjacent the driver's seated position in front of the steering wheel 2 and a speaker 6 is also shown located on the dash panel, although one or more speakers could be positioned at other appropriate locations throughout the interior of the vehicle.

The touch screen 5 may serve as an input device to allow the driver to enter a destination, either directly from a map or from a displayed menu of locations. Alternatively, the directions could be sent by wireless means from a transmitter to a wireless receiver located in the vehicle (as described later in connection with Fig. 4) through known technology. If the touch screen 5 includes a menu of destination locations, then the driver may select a destination by touching the touch screen in the respective area, causing the system to identify the destination selected by the driver. Alternatively, the touch screen may include a large-scale map and the driver may select his destination by touching the appropriate area of the map. Once the area has been selected by touching the map or a list of destinations, a more localized map or a more detailed destination list may be presented on the touch screen 5 and a more precise destination selected to allow the destination to be indicated with greater precision. That is, the first menu lists the destinations by category for selection (hotels, office buildings, cities, attractions, etc.) and then when the driver selects a category, a detailed list of destinations within the category is presented for selection. In the presentation of a map, a map showing the main routes and cities within a large scale of 100 miles by 100 miles might be presented, allowing the driver to select a destination region, then a smaller scale (perhaps 10 mile by 10 miles) map of the selected destination region would be presented. The process of providing more precise destination information for selection could be continued to other levels, if desired.

Fig. 2 illustrates the front interior portion of the vehicle as shown in Fig. 1 with a message 8 projected on the windshield 3 in front of the driver's position. The system for

providing such a message will be described in some detail in connection with later figures (particularly Fig. 3) but uses conventional equipment to display a message in an area of the windshield 3 which is within the line of sight of the driver. Since the message is an image projected onto the windshield 3, the driver is able to see through the message. Although the message is projected onto the windshield in the preferred embodiment, a special windshield is not required and no wiring within the windshield is necessary, an advantage since windshields can be damaged and require replacement and special windshields and wiring would add to the cost and difficulty of replacing the windshield 3.

The message 8 on the windshield contains variable information which is generated by a program and which is provided to a projection unit. In the preferred embodiment, the message 8 would include an indication that an action is desired (a turn), what action is desired (a left turn), where (at Main) and how far the action is away (500 feet). The name of the street is a part of the directions which are obtained from a map or driving directions, directions which are not a part of the present invention.

Fig. 3 is a block diagram of a data processing system 9 (also sometimes referred to as an electronics package) for practicing the present invention. In the preferred embodiment, the processing system 9 includes an antenna 11 connected to a wireless interface 10 for receiving and decoding wireless information, for example, map information, transmitted from a remote source. The wireless interface 10 is coupled within the data processing system 9 to a central processing unit (CPU) 12, random access memory or RAM 13 and nonvolatile memory 14 through a bus 18. The nonvolatile memory may be any form of conventional storage for use with a CPU such as disk, flash or other system for storing information in a system which does not erase when the power is removed.

A electronics interface box 30 is also coupled to the bus 18 and provides the necessary conversions for an input device such as a touch screen 5 described in connection with Fig.1. The electronics interface couples the input device in a known manner, translating the physical input into an analog signal (representing the location of the touch in x and y coordinates), then translates the analog signal indicating the coordinates into digital values for processing by the CPU 12 and storage in the random access memory 13.

Also coupled to the bus 18 are two interface units 50, 51, the first of which (interface unit 50) is operatively connected to drive speaker(s) 6 in response to signal from the CPU 12 through the bus 18. The second interface unit 51 is coupled to a projector 60 such as a heads-up projector. The heads-up projector 60 displays information on the windshield 3, dispatched by the CPU 12 from the RAM 13 to the projector 60 through the interface unit 51.

A global positioning system (GPS) system 95 is coupled to the bus 18 through an interface port 91 in a conventional manner. The GPS system 95 periodically provides the location of the unit (and the associated vehicle) within a small distance (perhaps 30 meters, depending on the accuracy of the GPS system employed). The GPS system provides the location of the unit and the vehicle in appropriate and conventional coordinates such as are used in military maps to accurately locate the vehicle. The frequency of updating of the position information is somewhat arbitrary and depends on the accuracy which is required. The projector 60 may include a brightness control allowing adjustment for a variety of circumstances. An initial message may be displayed in a dim (less intense) brightness and the level of brightness increase as the turn becomes closer. Alternatively, the display could initially be smaller and become larger as the turn is approaching.

Referring to Fig. 4, a block diagram of the present invention will be provided to illustrate one method of practicing the present invention. The location of a desired turn is stored in memory along with a message. Also stored in memory is advance warning information -- how far in advance of the desired turn is an alert to be provided. The present location of the vehicle is periodically determined at block 102 and compared at block 104 with the desired turn location. If it is determined to be within an advance warning zone at block 106, then an alert is determined and presented to the driver at block 108. Block 110 determines whether an audible alert is to be provided. If it is, then at block 112 the content of the audible alert is determined and provided to the speaker(s). Then, after a preset time period passes at block 114, control passes back to block 102 where a new position of the vehicle is determined and the process repeated.

Fig. 5 illustrates a windshield with an alternate message in the form of a display 8a of the area. In this view an illustration of an intersection is displayed. A traffic circle 210 and its intersecting roads 212, 214, 216, 218 and 220 are shown. A desired path 200 is shown for the vehicle, perhaps in color or using sequential illumination not shown in this view, from its entry into the traffic circle 210 from road 212 (at 202) to its exit at road 216 (at 204). Landmarks are shown in this display 8a such as a service station 222 and its distinguishing sign 223 and a hotel 224. While it would be desirable to use a real-time image of the intersection showing its current condition and traffic (an image from a camera which can be obtained from an overhead camera and transmission in any known manner, including over the Internet), many intersections are not covered by a camera today, so the use of either stored images or constructed images of the intersection will be used where no real-time image is available for an intersection.

The present system may be implemented in one of a variety of ways, allowing the designer to provide messages as desired. So, the system may be programmed to provide a first

notice when the vehicle is 10 seconds or 1000 feet from the desired turn and a second message at 2 seconds or 200 feet from the turn. It may just as easily be programmed to provide additional message(s) if desired at different time(s) or distance(s).

The foregoing description of the present invention assumes that directional information would be one type of information which might be conveyed to a driver. While the system provided certainly has that capability, it is also possible to provide additional information to a driver. Some of the information might be based on positioning information and recent activity, such as providing current traffic information (accident blocking expressway at exit 5), road conditions (Federal Highway flooded at Main Street), alternate route information (take Main Street at exit 4) and/or weather information (heavy snowstorm around Cleveland). Additionally, the system could be used to provide news and sports information to a driver and could even be used to send e-mail and advertisements to a driver (tune up special at All-Tune only \$30).

Another set of useful information to a driver might be a real-time camera image of the traffic at the next interchange on a limited access highway. As one is traveling down such a highway at rush hour, there may perhaps be multiple exits which one could use to go from the high speed limited access highway to surface streets with the attendant traffic and traffic signals. It may be desirable to take an interchange with less traffic rather than one which has more traffic, even if the latter one is closer to the destination. An image from a camera mounted above the interchange may have enough information so that the driver can determine whether to take the interchange or wait for another interchange.

Of course, many modifications of the present invention will be apparent to those skilled in the relevant art in view of the foregoing description of the preferred embodiment, taken together with the accompanying drawings. For example, the audible message on the necessary

turn might be the only message provided. Multiple messages might be provided at predetermined intervals, such as a first message “turn left at Main in 1000 feet” might be followed by “turn left at Main in 600 feet” followed by “turn left at Main in 100 feet” as described above. Also, different audible messages could be programmed to provide an indication as to which message is provided (e.g., one chime for a first alert message that the turn is a first distance away, two chimes indicating that the turn is a second or lesser distance away and three chimes indicating that the least distance threshold has been met; alternatively, the audible message might be provided through a buzz using a short buzz, a long buzz and a combination of short and long buzzes for different types of messages).

In place of providing messages at one (or more) preset distance(s) from the desired turn, the system could be set to provide messages at approximately preset time interval(s) before the turn, based on the speed of the vehicle over some period of time, speed which may be determined by taking the differences in distances observed by the global positioning system GPS 95 at different times using the formula that velocity equals the change in distance divided by the change in time.

If a driver becomes lost or it becomes necessary to establish a new path to a destination (for example, because visual clues have become obsolete or a road has been temporarily closed), the present invention can be used to advantage as follows: the GPS system 95 identifies the current position of the vehicle and driver. A new path to the destination is established using an alternate path. While such an alternate path may also become obsolete or have a detour also), the process may be repeated as necessary until a usable route is found.

There are various options for setting up the system initially. The origin and destination may be entered initially at a console in the vehicle or a GPS system can determine the initial

coordinates of the vehicle. The driver may enter a destination (by address or zip code) or select one of a list of preprogrammed destinations for a locale. Alternatively, the origin and destination may be entered from a remote personal computer. Then, using mapping facilities which are available as software for the PC (see TravRoute software which is described at

5 <http://www.travroute.com>) or available on-line (see <http://www.freetrip.com>). Once the route is identified, the PC software or the on-line system proposes one or more routes which the user can accept or modify to determine the path for the vehicle. Of course, the method of selecting a route is not particularly relevant to the present invention nor is the source of the directional information or how the system knows where the vehicle is located (for example, sensors along the roadway or odometer information could be used in place of the GPS system, if desired).

Additionally, many modifications can be made to the system implementation without departing from the spirit of the present invention. For example, the content of the message might be varied as desired, using descriptive symbols rather than words in a multi-lingual environment or a preferred language for any messages could be selected from a menu of supported languages. While the present invention has been programmed to provide alerting information about desired turns, a similar system could be programmed to provide information about landmarks and the environs to allow for sightseeing without a live guide by identifying the landmarks and providing information of interest. The system could also be used to locate amenities during traveling, such as rest areas, scenic vistas or filling stations, rather than preprogrammed turns
20 along a route. The system also has the capability of displaying other information, such as e-mail, advertising, news and weather reports or traffic advisories when it is not being used to provide directional information for driving. Further, some of the features of the present invention can be used without the corresponding use of other features. The audible indications are considered an

optional adjunct to the visual display of messages displayed on the windshield, but either one could be turned off, if desired. Any signal that a turn was missed may be included if desired or excluded or the system could include an option to turn on or off the feature of providing a missed turn indicator. Accordingly, the foregoing description of the preferred embodiment

5 should be considered as merely illustrative of the principles of the present invention and not in limitation thereof. Since some of the communications which can be displayed using the present invention (e.g., sightseeing information about the historical significance of landmarks, news or weather or advertising or e-mail) might be distracting if presented while the car is in motion, by suitable programming the present invention could include controls which limit those messages to

10 times when the vehicle is not in motion. Thus, detailed sightseeing information could be limited to those times when the vehicle is at rest (when the vehicle has pulled off to look at the landmarks) and e-mail and advertising might be displayed when the vehicle is stopped for a traffic signal or stopped due to rush hour congestion.

The present invention can be realized in hardware, software, or a combination of hardware and software. A data processing tool according to the present invention can be realized

15 in a centralized fashion in one computer system, or in a distributed fashion where different elements are spread across several interconnected computer systems. Any kind of computer system - or other apparatus adapted for carrying out the methods described herein - is suited. A typical combination of hardware and software could be a general purpose computer system with

20 a computer program that, when being loaded and executed, controls the computer system such that it carries out the methods described herein. The present invention can also be embedded in a computer program product, which comprises all the features enabling the implementation of the

CLAIMS

Having thus described the invention, what is claimed is:

1. An apparatus for providing information to the driver of a vehicle while the driver is
5 watching the road through the windshield without requiring that the driver remove his eyes from
the road, the apparatus comprising:

a positioning device which determines the location of the vehicle;

a storage device including stored information about the location of a desired driver
action;

10 a comparator which compares the location of the vehicle with the stored information
about the location of the desired driver action and which provides a signal when the location of
the vehicle is in a predetermined relationship to the location of the desired driver action; and

15 a projector which displays a message on the windshield indicating the desired driver
action in response to the signal.

2. An apparatus of the type described in Claim 1 where the projector is a heads-up
display.

3. An apparatus of the type described in Claim 1 wherein the apparatus further includes
20 an audible indicator of a message in response to the signal.

4. An apparatus of the type described in Claim 3 wherein the audible indicator includes a
speech synthesis system which provides an audible message.

5. An apparatus of the type described in Claim 3 wherein the audible indicator includes a speech synthesis system which can provide at least one audible message which is selected based on the desired driver action.

5 6. An apparatus of the type described in Claim 3 wherein the audible indicator includes a first indicator at a first distance from the desired location and a second indicator at a second, shorter distance from the desired location.

7. An apparatus of the type described in Claim 1 wherein the apparatus includes an indicator that the driver did not make the desired driver action, whereby the driver receives an indication of the missing of the desired driver action after the desired driver action was missed.

8. An apparatus of the type described in Claim 1 wherein the system includes a wireless receiver which receives broadcast traffic information and is coupled to the projector to display the broadcast traffic information.

9. An apparatus of the type described in Claim 1 wherein the system includes a wireless receiver which receives weather information sent from outside the vehicle, with the wireless receiver coupled to the projector for displaying the weather information to the driver.

10. An apparatus of the type described in Claim 1 wherein the system includes a wireless receiver which receives advertising information and couples to the projector to display the advertising information to the driver.

11. A method of providing driving instructions including the steps of
sensing the position of the vehicle;
comparing the position of the vehicle with a desired location;
if the vehicle is in a predetermined relationship with respect to a desired location,

5 generating a signal which indicates that the driver should take an action; and
in response to the signal, displaying on the windshield a message indicating the action the
driver should take.

12. A method including the steps of Claim 11 wherein the step of generating a signal
10 includes the step of providing an audible signal indicating that the driver should take an action.

13. A method including the steps of Claim 12 wherein the step of providing an audible
signal indicates that a message is displayed on the windshield.

14. A method including the steps of Claim 12 wherein the step of providing an audible
15 signal includes the step of broadcasting the message on a speaker.

15. A method including the steps of Claim 11 wherein the method further includes the
step of displaying a distance to the desired action.

16. A method including the steps of Claim 11 where the method further includes the step
of determining the speed of the vehicle and providing an indication of a desired action a
predetermined time period in advance of the desired action.

17. A method including the steps of Claim 11 wherein the method further includes the step of determining when the vehicle has passed the desired location and providing an indication that the driver has missed the turn, whereby the driver may take action more quickly to recover from missing the desired location.

18. A method including the steps of Claim 11 wherein the predetermined relationship is estimated time to the desired location.

19. A method including the steps of Claim 11 wherein the predetermined relationship is distance to the desired location.

20. A program stored on a storage medium for generating a displayed message to a driver on the windshield of his car, the program comprising:

- a program element for determining a message for display;
- a program element for determining an appropriate time for displaying the message;
- a program element coupled to a projector for providing a message for display at the appropriate time for the display, whereby the message can be displayed to the driver on the windshield of his car at the appropriate time.

METHOD AND SYSTEM FOR PROVIDING DIRECTIONS FOR DRIVING

Abstract of the Disclosure

A system and method of providing information (such as directions) to a driver of a vehicle with the capability of presenting such information while the driver is driving the car and without requiring that the driver remove his eyes from looking out the windshield at the road ahead. A positioning device is associated with the vehicle and determines the present location of the vehicle. The present location of the vehicle is compared with a desired location (e.g., the location of a desired turn at an intersection) necessary to reach a preset destination which has been stored in an on-board memory. When the vehicle is in a predetermined relationship (e.g., 500 feet or 10 second before the intersection), an advisory message is provided to the driver by projecting the message on the windshield using a heads-up display projector so that the driver can prepare for and make the necessary movement (e.g., turning the correct way at the desired intersection). An optional auditory signal can be provided to give the driver an additional message indicating the necessary action, either in general ("look at windshield for action" or a bell or chime) or specifically indicate the necessary action through the use of a speech synthesizer which provides an audible instruction (such as "turn right at Main"), with optionally different sound indicators depending on the urgency of the action. A wireless receiver can be used with the processing unit and projector display of the present invention for displaying on the windshield other information such as road conditions, traffic and weather information, as well as advertising and e-mail. The present invention contemplates that images of intersections (live pictures, photos or sketches) may be displayed to indicate the proper turn and provide landmark information to assist in determining the appropriate turn.

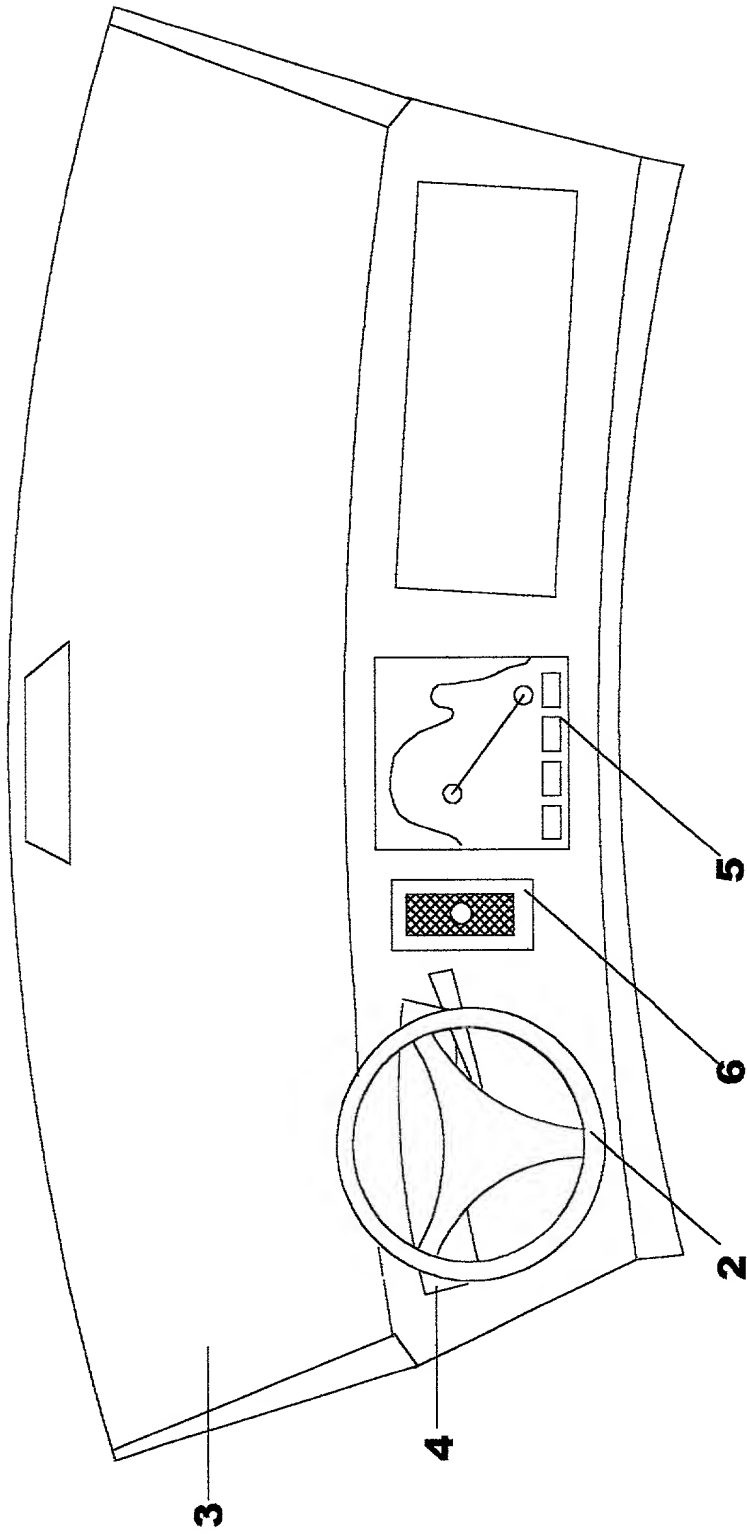


FIG. 1

006260-8692960

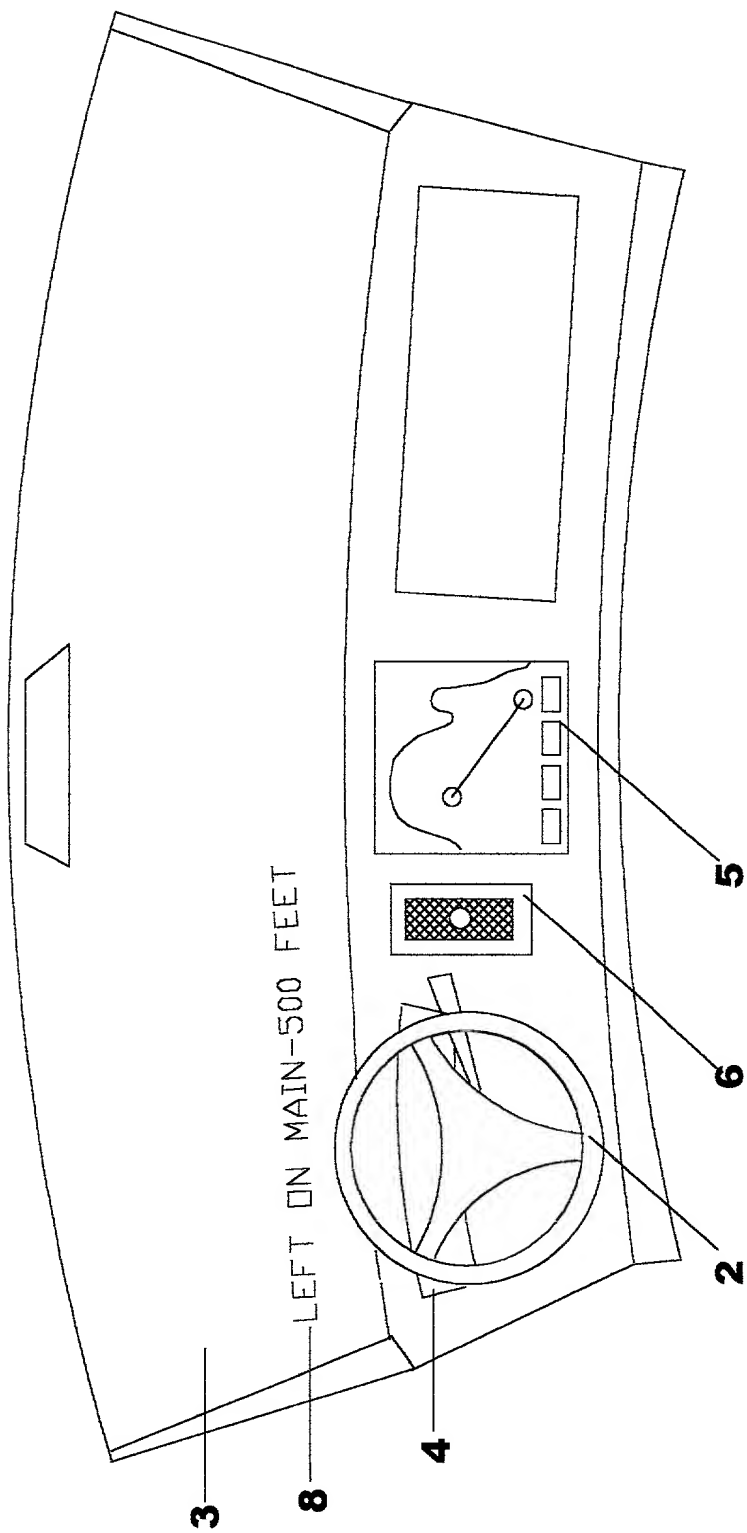


FIG. 2

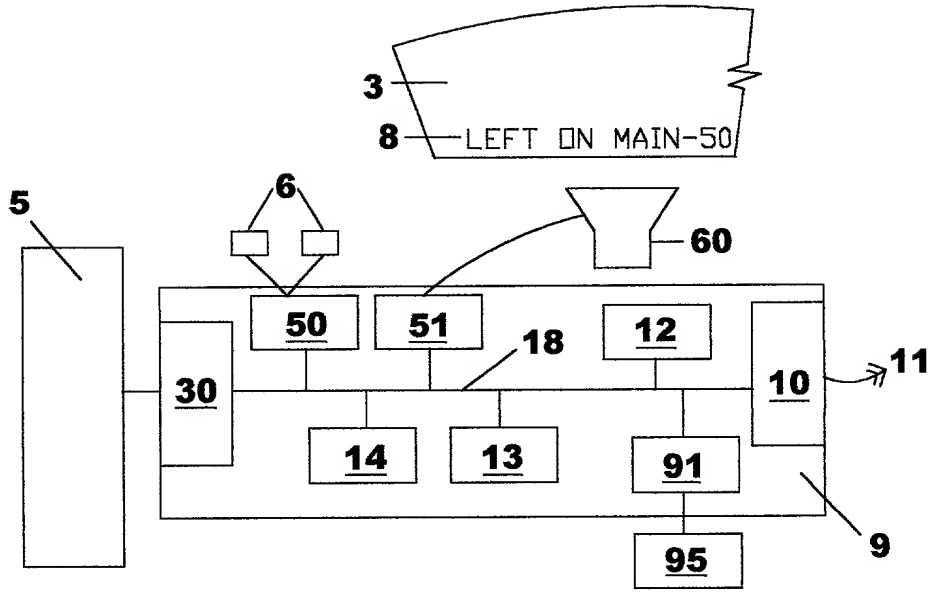


FIG. 3

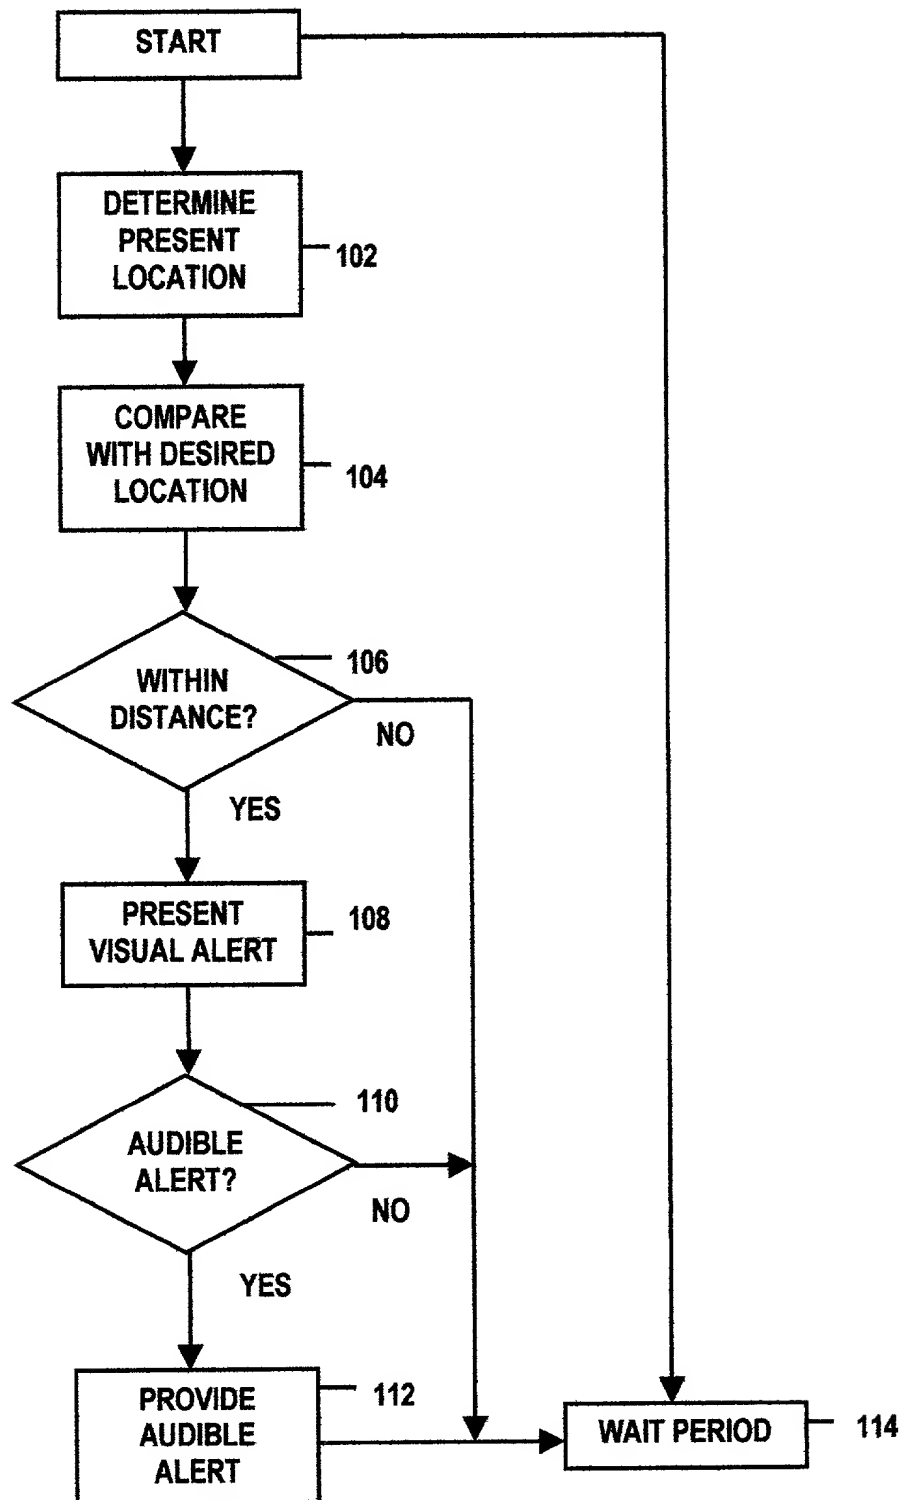


FIG. 4

006360" 36592960

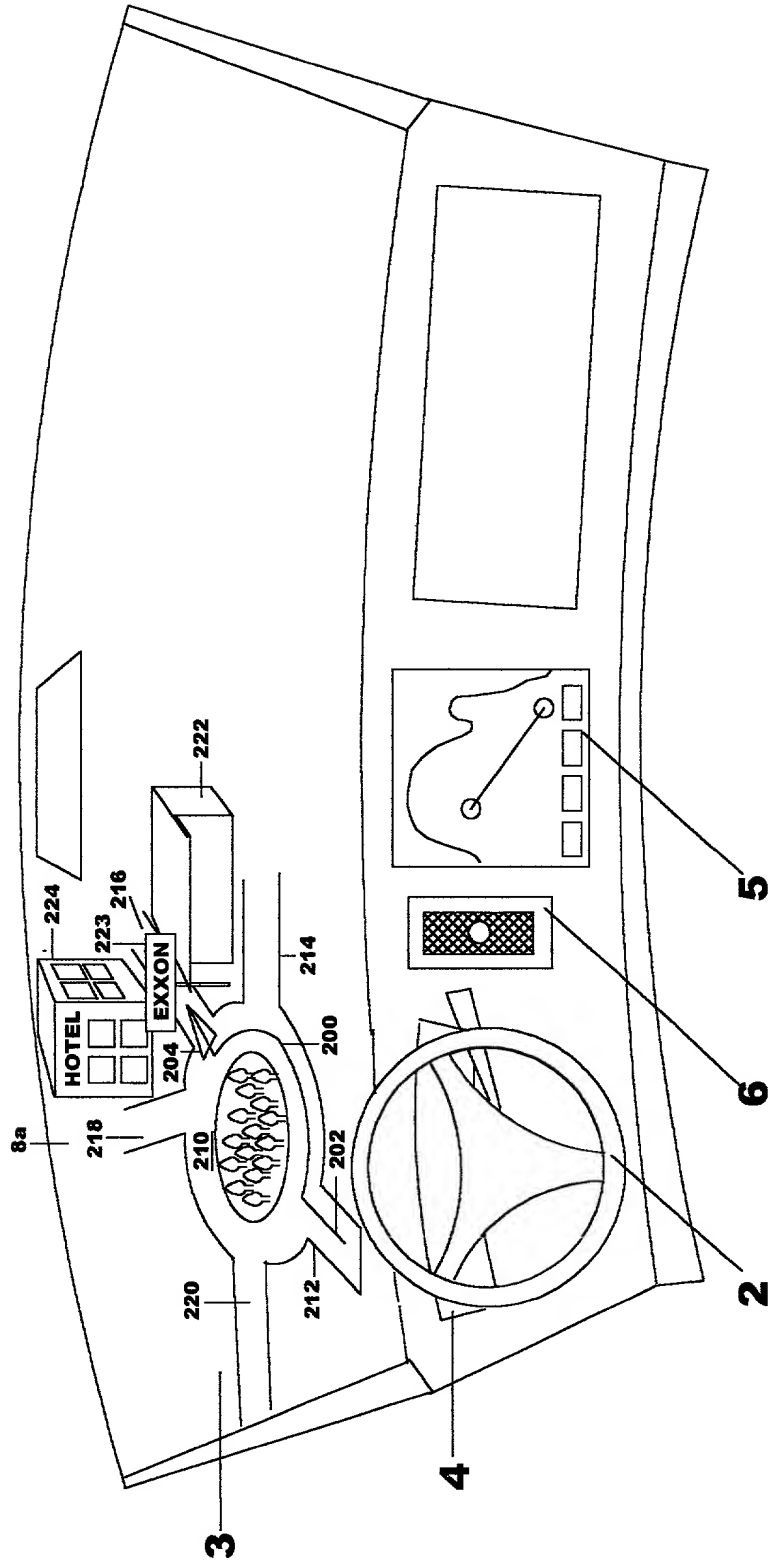


FIG. 5

006260-8692960

Docket No. BOC9-2000-0005US1

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name:

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

METHOD AND SYSTEM FOR PROVIDING DIRECTIONS FOR DRIVING

the specification of which (check one)

XX is attached hereto.

___ was filed on _____

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application, having a filing date before that of the application on which priority is claimed: (none)

Prior Foreign Application(s)			Priority Claimed	
(Number)	(Country)	(Day/Month/Year Filed)	___ Yes ___ No	
_____	_____	_____	___ Yes ___ No	
_____	_____	_____	___ Yes ___ No	
_____	_____	_____	___ Yes ___ No	

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below.

(none)	
(Application Number)	(Filing Date)
_____	_____
(Application Number)	(Filing Date)
_____	_____

Docket No. BOC9-2000-0005US1

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

I hereby claim the benefit under 35 U.S.C. §120 of any United States Application(s), or §365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States, or PCT International application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose information material to the patentability of this application as defined in 37 CFR §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(none)		
(Application Serial No.)	(Filing Date)	(Status) (patented, pending, abandoned)

(Application Serial No.)	(Filing Date)	(Status) (patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number):

Richard A. Tomlin (Reg. 24,449), A. P. Tennent (Reg. 35,807), Norman L. Gundel (Reg. 30,387), F. T. Boehm (Reg. 32,458) and Kenneth A. Seaman (Reg. 28,113).

Send Correspondence to: Richard A. Tomlin, IBM Corporation (Internal Zip 2106), 1798 NW 40th Street, Boca Raton, Florida 33431

Direct Telephone Calls to: (name and telephone number) Richard A. Tomlin - 561-443-9786

Howard L. Operowsky

Full name of sole or first inventor

Howard L. Operowsky
Inventor's Signature

9/26/00

Date 9/26/00

3 Club Way, Poughkeepsie, New York 12603
Residence

United States

Citizenship

Same as above

Post Office Address

Docket No. BOC9-2000-0005US1

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATIONEdith H. Stern

Full name of second joint-inventor, if any

Edith H. Stern9/26/00

Date

Inventor's Signature

661 Hanover Street, Yorktown Heights, NY 10598

Residence

United States

Citizenship

same as above

Post Office Address

Barry E. Willner

Full name of third joint-inventor, if any

Barry E. Willner9/26/2000

Date

Inventor's Signature

365 Pine Road, Briarcliff Manor, New York 10510

Residence

United States

Citizenship

same as above

Post Office Address